


HAIKU INDOOR

THE CEILING FAN, REINVENTED



CB

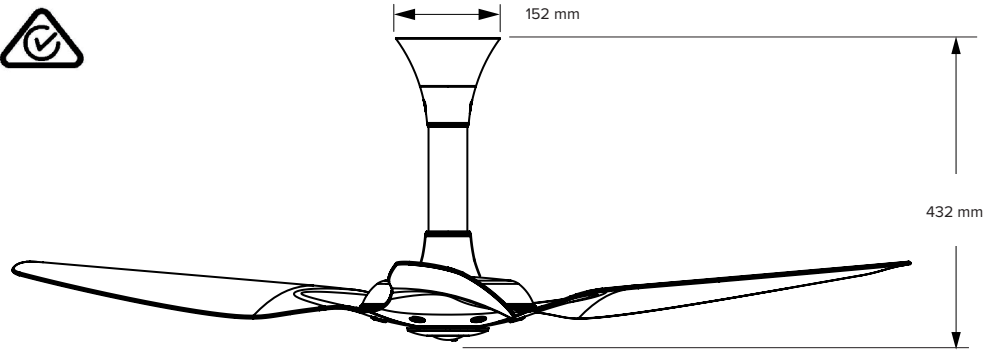

Flat ceilings from 2.5–3.4 m

Construction Features

| Aerofoils | Motor | Controls ¹ | Onboard Sensors ² | Mounting | Environment | Accessories |
|------------------------------------|--|---|---|--|-----------------|----------------------------------|
| Bamboo or aircraft-grade aluminium | High-efficiency, brushless DC/EC motor | Handheld remote Haiku mobile app Voice control 0–10 V (optional) | Temperature, humidity, and motion sensors enable SenseME Technology | Flat ceilings from 8.5–11 ft (2.5–3.4 m) | Indoor use only | Haiku Light Kit 0–10 V Module |

Aluminum Fan Specifications

| Diameter | Mount | Weight ¹ | Max Speed | Airflow Min/Max | Watts Min/Max | Operating Voltage | Ambient Operational Temperature | Sound Level ² |
|----------|----------|---------------------|-----------|-------------------|---------------|----------------------------|---------------------------------|--------------------------|
| 127 cm | Standard | 7.5 kg | 200 RPM | 1,389 / 6,713 cfm | 2.1 / 20.7 W | 100–240 VAC, 1 Φ, 50–60 Hz | 32° to 104° F (0° to 40° C) | <35 dba at max speed |
| 150 cm | | 8.4 kg | | 1,194 / 8,629 cfm | 1.9 / 26.8 W | | | |

Bamboo Fan Specifications

| Diameter | Mount | Weight ¹ | Max Speed | Airflow Min/Max | Watts Min/Max | Operating Voltage | Ambient Operational Temperature | Sound Level ² |
|----------|----------|---------------------|-----------|-------------------|---------------|----------------------------|---------------------------------|--------------------------|
| 127 cm | Standard | 6.4 kg | 200 RPM | 1,427 / 6,597 cfm | 2.3 / 26.6 W | 100–240 VAC, 1 Φ, 50–60 Hz | 32° to 104° F (0° to 40° C) | <35 dba at max speed |
| 150 cm | | 7.3 kg | | 1,038 / 7,673 cfm | 1.8 / 21.4 W | | | |

Remote




Handheld remote

Remote with mount

Haiku Light Kit



Aerofoil Finishes

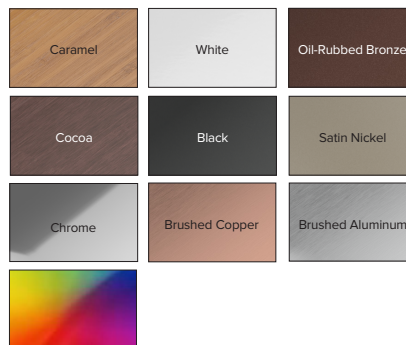

Hardware Finishes



¹ Voice control requires an Amazon Alexa-enabled device or the Google Assistant.
² SenseME Technology and the Haiku mobile app are supported by Android™ and iOS®.

Lead times may vary.
 Warranty period and terms vary by country and application.