

Elevate your style and comfort with a Haiku ceiling fan. Built from premium materials and featuring cutting-edge SenseME technology, Haiku has won more than 75 international design and tech awards.

### THE CEILING FAN, REINVENTED


- **Airfoils** — Bamboo or aircraft-grade aluminum; 52 in., 60 in., or 84 in. (1.3 m, 1.5 m, or 2.1 m) fan sweep
- **Motor** — High-efficiency, brushless DC motor with digital inverter drive
- **Controls** — [Remote control](#), Haiku mobile app<sup>1</sup>, voice control<sup>2</sup>, or [0–10 V module](#) (optional)
- **Onboard Sensors** — Ambient and surface temperature, relative humidity, and passive infrared sensors enable [SenseME technology](#)
- **Mounting** — Flat or sloped ceilings (< 33°) 8 ft (2.4 m) and taller
- **Environment** — Indoor use only
- **Operating Voltage** — 100–240 VAC, 1 Φ, 50–60 Hz
- **Sound Level** — <35 dba at max speed<sup>3</sup>
- **Accessories** — [Haiku Light Kit](#). Optional extension tube lengths and a Stabilizer Kit are available for ceilings over 14 ft (4.3 m).
- **Warranty** — Visit the [Big Ass Fans website](#) for details.



#### Hardware Finishes



#### Airfoil Finishes

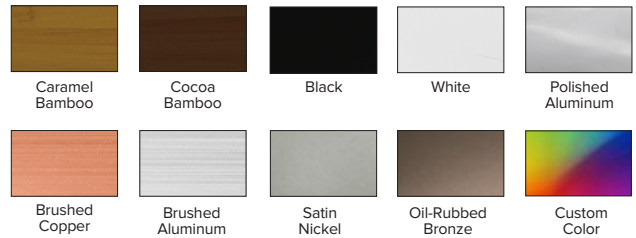

### ORDERING INFORMATION

| DIAMETER                                     | MOUNT  | AIRFOIL, MOTOR FINISH   | COUNTRY  | MOTOR                            | GEN | AIRFOIL FINISH (ALUMINUM ONLY)   |
|--|--------|---|--|----------------------------------|-----|--|
|  |        |   |  |                                  | 01  |  |
| 52 in: S3127<br>60 in: S3150<br>84 in: B3213 | 52 in. | Aluminum, Black: AB<br>Aluminum, ORB: AO<br>Aluminum, SN: AS<br>Aluminum, White: AW<br>Bamboo Caramel, Black: BC<br>Bamboo Caramel, ORB: BCO<br>Bamboo Caramel, SN: BCS<br>Bamboo Caramel, White: BCW<br>Bamboo Cocoa, Black: BW<br>Bamboo Cocoa, ORB: BWO<br>Bamboo Cocoa, SN: BWS<br>Bamboo Cocoa, White: BWW | North America: 0402<br>Europe: 0502<br>Japan: 0602<br>Saudia Arabia, UAE: 0802 | 52 in: C<br>60 in: C<br>84 in: D | 01  | Black: F258<br>White: F259<br>Polished Aluminum: F421<br>Brushed Copper: F523<br>Brushed Aluminum: F531<br>Satin Nickel: F470<br>Oil-Rubbed Bronze: F471 |
|  | 60 in. | Low Profile: S0<br>Standard: A2<br>Universal: X2  |  |                                  |     |  |
|  | 84 in. | Universal: X4   |  |                                  |     |  |

<sup>1</sup> SenseME Technology and the Haiku mobile app are supported by Android™ and iOS®.

<sup>2</sup> Voice control requires an Amazon Alexa-enabled device or the Google Assistant.

<sup>3</sup> Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions.

Lead times may vary.

Specifications subject to change without notice.

Warranty period and terms vary by country and application.



USA  
BIGASSFANS.COM  
855-694-2458

CANADA  
BIGASSFANS.COM  
844-924-4277

AUSTRALIA  
BIGASSFANS.COM/AU  
1300 244 277

SINGAPORE  
BIGASSFANS.COM/SG  
+65 6709 8500

## ALUMINUM SPECIFICATIONS

| DIAMETER           | MOUNT       | WEIGHT <sup>4</sup> | MAX SPEED | AIRFLOW MIN/MAX  | WATTS MIN/MAX |
|--------------------|-------------|---------------------|-----------|------------------|---------------|
| 52 in.<br>(127 cm) | Low Profile | 16.5 lb (7.5 kg)    | 177 RPM   | 1,301/5,629 cfm  | 2.2/15.6 W    |
|                    | Standard    | 16.5 lb (7.5 kg)    | 200 RPM   | 1,389/6,713 cfm  | 2.1/20.7 W    |
|                    | Universal   | 15.5 lb (7 kg)      | 200 RPM   | 1,389/6,713 cfm  | 2.1/20.7 W    |
| 60 in.<br>(150 cm) | Low Profile | 18.5 lb (8.4 kg)    | 177 RPM   | 1,070/6,698 cfm  | 1.9/18.4 W    |
|                    | Standard    | 18.5 lb (8.4 kg)    | 200 RPM   | 1,194/8,629 cfm  | 1.9/26.8 W    |
|                    | Universal   | 17.5 lb (8 kg)      | 200 RPM   | 1,194/8,629 cfm  | 1.9/26.8 W    |
| 84 in.<br>(213 cm) | Universal   | 26 lb (11.8 kg)     | 135 RPM   | 5,983/19,292 cfm | 4.2/53.7 W    |




## BAMBOO SPECIFICATIONS

| DIAMETER           | MOUNT       | WEIGHT <sup>4</sup> | MAX SPEED | AIRFLOW MIN/MAX  | WATTS MIN/MAX |
|--------------------|-------------|---------------------|-----------|------------------|---------------|
| 52 in.<br>(127 cm) | Low Profile | 14 lb (6.4 kg)      | 177 RPM   | 1,483/5,866 cfm  | 2.2/19.2 W    |
|                    | Standard    | 14 lb (6.4 kg)      | 200 RPM   | 1,427/6,597 cfm  | 2.3/26.6 W    |
|                    | Universal   | 13 lb (5.9 kg)      | 200 RPM   | 1,427/6,597 cfm  | 2.3/26.6 W    |
| 60 in.<br>(150 cm) | Low Profile | 16 lb (7.3 kg)      | 177 RPM   | 876/6,165 cfm    | 1.9/15.5 W    |
|                    | Standard    | 16 lb (7.3 kg)      | 200 RPM   | 1,038/7,673 cfm  | 1.8/21.4 W    |
|                    | Universal   | 15 lb (6.8 kg)      | 200 RPM   | 1,038/7,673 cfm  | 1.8/21.4 W    |
| 84 in.<br>(213 cm) | Universal   | 21 lb (9.5 kg)      | 135 RPM   | 4,661/15,378 cfm | 3.8/39.2 W    |




## DIMENSIONS AND MOUNTS <sup>5</sup>

### Low Profile Mount

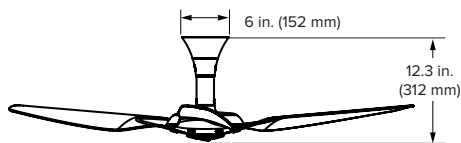


Flat ceilings as low as 8 ft (2.4 m)

### Standard Mount

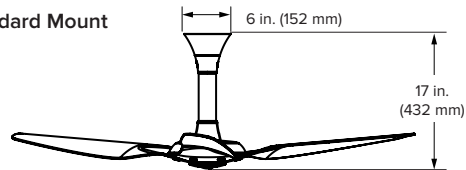

Flat ceilings from 8.5–11 ft (2.5–3.4 m)

### Universal Mount

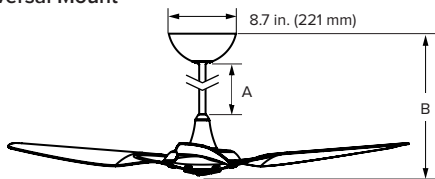

Sloped or flat ceilings from 9–18 ft (2.9–5.5 m)

### Universal Mount Extension Tube Lengths

| Extension Tube (A) | Included                 |                       |                        |                       |                     | Optional*                |                       |                        |                       |                     |
|--------------------|--------------------------|-----------------------|------------------------|-----------------------|---------------------|--------------------------|-----------------------|------------------------|-----------------------|---------------------|
|                    | 20 in.<br>(508 mm)       | 32 in.<br>(813 mm)    | 7 in.<br>(178 mm)      | 48 in.<br>(1219 mm)   | 60 in.<br>(1524 mm) | 29 in.<br>(737 mm)       | 41 in.<br>(1041 mm)   | 16 in.<br>(406 mm)     | 57 in.<br>(1448 mm)   | 69 in.<br>(1753 mm) |
| Fan Height (B)**   | 29 in.<br>(737 mm)       | 41 in.<br>(1041 mm)   | 16 in.<br>(406 mm)     | 57 in.<br>(1448 mm)   | 69 in.<br>(1753 mm) | 9.5–11 ft<br>(2.9–3.4 m) | 11–13 ft<br>(3.4–4 m) | 9–11 ft<br>(0.2–2.9 m) | 13–14 ft<br>(4–4.3 m) | >14 ft<br>(>4.3 m)  |
| Ceiling Height     | 9.5–11 ft<br>(2.9–3.4 m) | 11–13 ft<br>(3.4–4 m) | 9–11 ft<br>(0.2–2.9 m) | 13–14 ft<br>(4–4.3 m) | >14 ft<br>(>4.3 m)  |                          |                       |                        |                       |                     |

\* Optional extension tube lengths packaged separately. The 7 in. (178 mm) tube is not available for 84-inch (2134 mm) fans.  
\*\* Add 0.8 in. (20 mm) for 84-inch (2134 mm) diameter fans.

<sup>4</sup> The precise fan weight will vary based on individual component weights and finishing.  
<sup>5</sup> Fan heights do not include the Haiku Light kit.

Lead times may vary.  
Specifications subject to change without notice.  
Warranty period and terms vary by country and application.



USA  
BIGASSFANS.COM  
855-694-2458

CANADA  
BIGASSFANS.COM  
844-924-4277

AUSTRALIA  
BIGASSFANS.COM/AU  
1300 244 277

SINGAPORE  
BIGASSFANS.COM/SG  
+65 6709 8500