

# HAIKU<sup>®</sup> L

Remake your space the way you've always dreamed with Haiku L. Your entry point for Big Ass Fans style and performance, Haiku L delivers comfort with perfect silence and a sleek, classic design. Experience how its powerful, efficient airflow and seamlessly integrated LED will transform the look and feel of your space, indoors or out.



## KEY FEATURES

- ▶ **Hand-balanced** hybrid resin airfoils in classic black or white
- ▶ **Seamlessly integrated LED kit** with 16 dimmable settings
- ▶ **Handheld remote** with wall mount; optional 0–10V and wired wall control
- ▶ **Permanent-magnet motor** for whisper-quiet, energy-efficient airflow
- ▶ **Indoor and outdoor models** available

### DIAMETER

**44 AND 52 INCHES**  
(112 AND 132 CM)

### MOUNTING

**UNIVERSAL**

### CONTROL

**IR REMOTE**

### WARRANTY

UP TO  
**5 YEARS**  
INDOOR

UP TO  
**3 YEARS**  
OUTDOOR




**COMFORT WITHOUT  
COMPROMISE**

**DISCOVER MORE  
ABOUT HAIKU L**

Learn more at [bigassfans.com/haiku-l](https://bigassfans.com/haiku-l)  
or call **877.BIG.FANS** for a free custom quote.

# HAIKU L

WITH IMPRESSIVE AIRFLOW AND A CLEAN AESTHETIC, HAIKU L BRINGS COMFORT AND ELEGANCE WITHIN REACH.

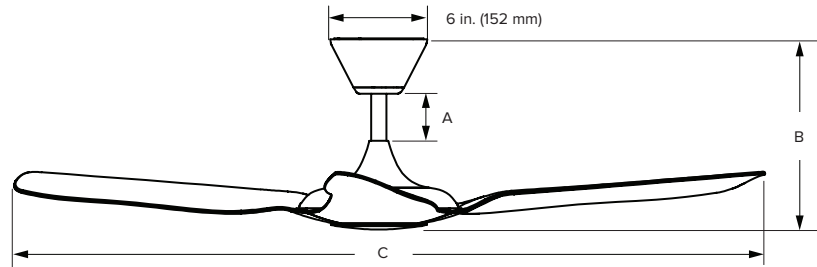

Downrod Lengths						
Downrod (A) <sup>1</sup>	Included	Optional				
		5 in. (128.5 mm)	10 in. (256 mm)	22 in. (561 mm)	34.8 in. (884 mm)	50.8 (1291 mm)
Fan Height (B)	11.5 in. (289 mm)	16.4 in. (417 mm)	28.4 in. (721 mm)	41.1 in. (1044 mm)	57.1 in. (1451 mm)	69 in. (1755 mm)
Ceiling Height	≥ 8 ft (≥ 2.4 m)	≥ 9 ft (≥ 2.7 m)	≥ 10 ft (≥ 3 m)	≥ 11 ft (≥ 3.4 m)	≥ 12 ft (≥ 3.7 m)	≥ 13 ft (≥ 4 m)

Fan Specifications							
Diameter (C)	CFM (Max)	Speed (Min/Max)	Watts (Max)	Environment <sup>2</sup>	Input Power	Weight	Sound Level <sup>3</sup>
44 in. (112 cm)	4,662 CFM	60/260 RPM	19.3 W	Indoor	100–240 VAC, 50/60 Hz, 1 Φ	11.9 lb (5.4 kg)	<35 dBA at max speed
52 in. (132 cm)	5,204 CFM	35/201 RPM	20.3 W	Indoor or outdoor UL wet rated			

Light Specifications	
Color Temp	CRI
2700 K	90

Construction Features					
Airfoils	Motor	Controls	Integrated LED Light	Mounting	Accessories
Hybrid resin construction	High-efficiency, brushless EC motor	Handheld remote Wall control 0–10 V	Settings include on/off, Sleep mode, and 16 dimmable light levels	Indoor: Flat or sloped ceilings 8 ft (2.4 m) or taller Outdoor: Flat ceilings 8 ft (2.4 m) or taller	Wall Control 0–10 V Module

Ordering Information	
White	Black
44 inch (112 cm), Indoor: FR112C-U1H00-3L00-09259-259P610 52 inch (132 cm), Indoor: FR127C-U1H00-3L00-09259-259P610 52 inch (132 cm), Outdoor: FR127C-U1H00-3L06-09259-259P610	44 inch (112 cm), Indoor: FR112C-U1H00-3L00-09258-258P610 52 inch (132 cm), Indoor: FR127C-U1H00-3L00-09258-258P610 52 inch (132 cm), Outdoor: FR127C-U1H00-3L06-09258-258P610

## Finish Options



## Remote



Lead times may vary. See full warranty for coverage information.

<sup>1</sup> Optional downrod lengths packaged separately. Lengths in inches are rounded to the nearest whole number.  
<sup>2</sup> Wet-rated fans installed in exposed outdoor locations must have fixed/permanent coverage above the fan wiring cover. The included fan stabilizer must be installed.  
<sup>3</sup> Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions.