
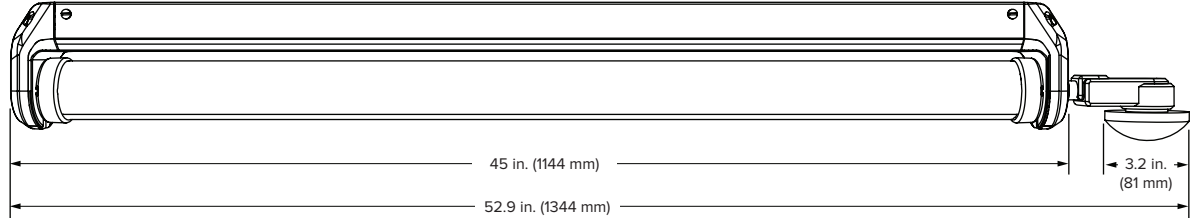


Garage Light

Technical Specifications



CONSTRUCTION, CERTIFICATIONS, AND WARRANTY

Construction	Optics	Controls	Installation	Certifications and Ratings	Warranty ¹
Extruded aluminum housing and heatsink	Rotatable light module with a snap on diffused lens for a brilliant distribution of light	Optional occupancy with Bluetooth programming	Junction Box Flush Mount	Intertek/ETL listed to UL 1598 and CSA C22.2 No. 250.0 Damp Rated	10 years

¹ Complete fixture warranty; certain exclusions apply. Warranty may vary by country.

PERFORMANCE AND OPERATION

Lumen Package	Lumen Output ¹	Wattage ²	Efficacy ³	Operating Temperature ⁴	Weight	Typical CRI	Surge Protection	Rated Life ⁴
12 K	12,221 lm	66 W	187 lm/W	-40°F to 149°F (-40°C to 65°C)	12 lb (5.4 kg)	80+	6 kV	Calculated L70 > 150,000 hours

¹ Measured at 277 V, 4000 K color temperature without lens.

² Wattage varies by operating voltage.

³ Efficacy varies by input voltage, color temperature, and test location.

⁴ Typical value based on 77°F (25°C) ambient measurements.


ORDERING INFORMATION

Lighting	Series	Lumen Package	Color Temp	System Voltage	Lens	Fixture Wiring ¹	Mounting	Controls
BAF	GL1	12: 12,221 lm	04: 4000K 05: 5000K	01: 120–277 V	00: No lens 04: Diffused	99: 10 ft (3 m) cord installed on end cap P0: No cord, flush/pendant wiring	10: Flush mount or junction box	00: No controls/dimming 01: Occupancy/photo sensor

¹ Lead times may vary depending on options selected.

OPTIONAL OCCUPANCY SENSOR

Coverage	Features	Technology	Programming
360 degrees of coverage at 40 ft (12.2 m) height	High/Low modes Multiple dimming options Adjustable ramp-up and fade-down Time delay (5 minutes default) Cut off (1 hour default)	Passive infrared	Bluetooth app

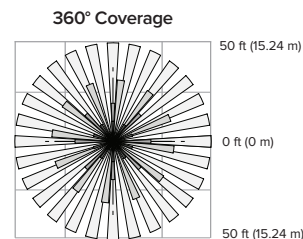

Specifications subject to change without notice.



USA
BIGASSFANS.COM
877-244-3267

CANADA
BIGASSFANS.COM
844-924-4277

AUSTRALIA
BIGASSFANS.COM/AU
1300 244 277

SINGAPORE
BIGASSFANS.COM/SG
65 6709 8500

MALAYSIA
BIGASSFANS.COM/SG
603 5565 0888